

Double Laminated Floor Blocking

Floor blocking

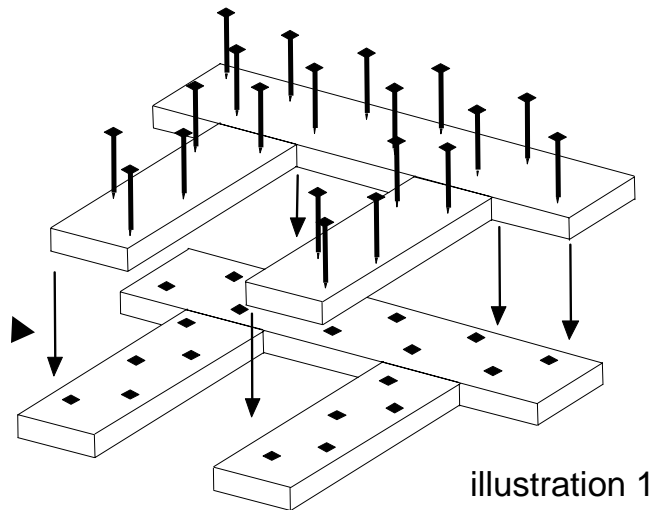


illustration 1



FLOOR BLOCKING SHOULD BE CONSTRUCTED OF DOUBLE LAMINATED 2x6 OR 2x4 LUMBER WITH BACK UP CLEATS AT LEAST 18 INCHES LONG. NAILS SHOULD BE STAGGARD AND SPACED APROXIMATLY 4 TO 5 INCHES APART.

This load plan is intended for general information purposes only and is not recommended for any specific cargo. Other Carriers are not required to accept this load plan or any plan suggested by Union Pacific Railroad. This information is offered to shippers to assist in understanding the rail environment, the shipper is ultimately responsible for choosing how best to package, block and brace its cargo to avoid damage to the cargo and rail equipment.



Union Pacific Damage Prevention
File:Double laminated floor blocking

Date: 09/15/05 By: EOW